

Flashings and Ancillaries

Hemsec Panel Technologies operate an in-house fabrication department, which can provide flashing and ancillary items to suit your installation requirements. The flashings are manufactured with all your technical specifications adhered to.

COLOUR MATCH

HPT offer a comprehensive solution to your construction needs with the added benefit of your flashing requirements matching PIR Panels from our production line, we achieve this by utilising the same steel coil to gain the exact finish required.


BESPOKE FLASHING MANUFACTURE

HPT can manufacture flashings of varying designs and are able to produce folded items up to a maximum length of 3000mm, for further information simply send us your requirements.

PRODUCT DETAILS

HPT can provide flashings and ancillaries for various internal or external applications and all flashings are available with safety folds except for galvanised and 5 bar aluminium.

Stock Items	Unit Quantity
50mm WFSL Channel with Safety Edges	3000mm length
100mm WFSL Channel with safety edges	3000mm length
50 x 50 WFSL Internal Angle with safety edges	3000mm length
150 x 50 WFSL External Angle with safety edges	3000mm length
100 x 50 WFSL External Angle with safety edges	3000mm length
100mm WFSL Cover Strip with safety edges	3000mm length
4.8mm x 12mm White Alu Rivets	500/box
4.8mm x 12mm Plain Alu Rivets	500/box
White Silicone (for Industry chiller/freezer, non food contact)	20 tubes/box
White silicone (for food contact)	25 tubes/box
580 Dow Corning Mastic	20 tubes/box
M6 x 50 Boldor Fixings (plug & screw)	100/box
10 Pack - 2 Part Flexi Edge Coving (alu backer/pvc flexi edge)	5000mm length
2mm Inverted Galv Top Hat Full Kit (incl drop rods/PIR inserts/WFSL bottom covers)	3600mm length
A2 top hat – 2mm galv WPC full kit	3600mm length

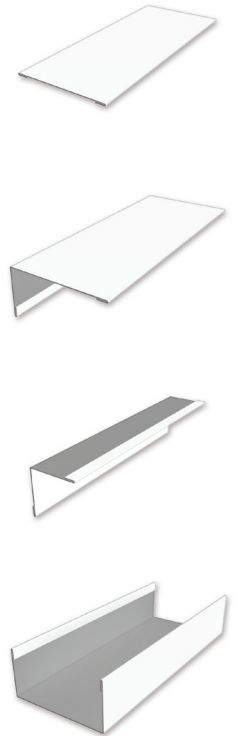

Various other sizes and flashings are available on request, e.g. galvanised, 5 bar, stainless steel, polyester, HP200 colours..

SHEET METAL

HPT can offer flat sheet metal as per the table below.

Material	Thickness Available	Length
Foodsafe	0.5mm	3000mm
Primer (Backing Coat)	0.5mm	3000mm
Galvanised	1.0mm, 1.5mm, 2.0mm	2500mm / 3000mm
Stainless Steel (brushed)	0.7mm	3000mm
Aluminium 5 Bar	2.0mm	2500mm

Alternative sheet lengths, colours and finishes are available on request.

PACKAGING

All flashings, ancillaries and sheet metal are packaged to suit the transportation method required.

